


Roof drains TOPWET TW

BASIC INFORMATION


purpose	flat roofs drainage
material	drain body – polyamide PA6, dome – polyamide PA6
integrated connection sleeve	BIT – modified bituminous APP strip, TPO – thermoplastic (flexible) polyolefin, EPDM – synthetic rubber foil, PVC - mPVC based foil, STE – of liquid sealing, VAP - self adhered vapour barrier comprised of SBS modified bitumen adhesive, laminated with high-density polyethylene top surface
colour	orange
certification	ASME A112.6.4-2003
manufacturer	TOPWET s.r.o., náměstí Viléma Mrštíka 62, 664 81 Ostrovačice, Czech Republic

TECHNICAL PARAMETERS

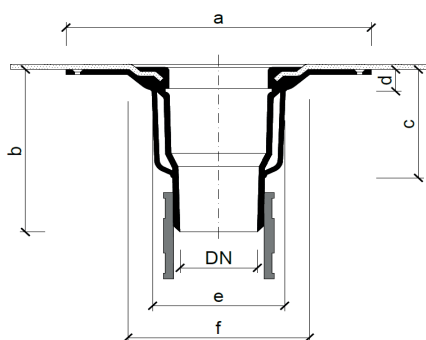

Straight roof drains

Type	DN	Dimensions [in]					
		a	b	c	d	e	f
TW 3" S	3	13	8	6	1	6 1/4	8
TW 4" S	4	13	8	5 1/4	1	6 1/4	8
TW 5" S	5	13	8	5 1/4	1	6 1/4	8

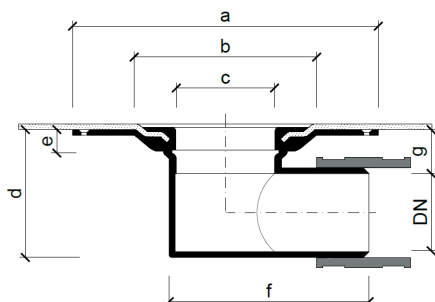

Horizontal roof drains

Type	DN	Dimensions [in]						
		a	b	c	d	e	f	g
TW 4" H	4	13	8	5	6 1/4	1 1/2	9 1/2	2